IRONSPIDER
SHEET METAL FABRICATION

EDGE METAL ORDER FORM

Drip edge · gravel stop · Form EDGE-METAL-1

CONTACT

NAME

COMPANY

PHONE

EMAIL

JOB

◯ QUOTE ◯ ORDER

JOB NAME


CITY

STATE

NEEDED BY

PART / MARK

PROFILE

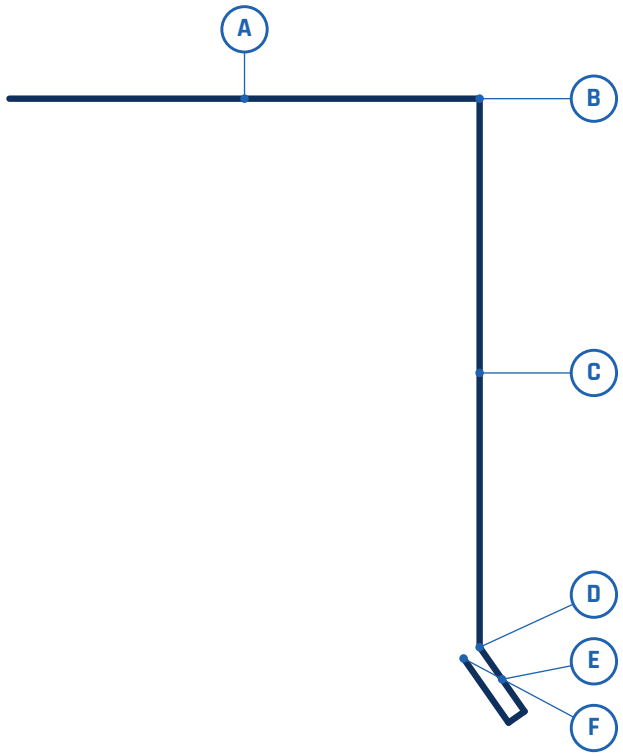

Lettered dimensions match the table

DIMENSIONS

Blank = made to the standard

A	**Nailable top** std 3" · 1"–8"		in
B	**Top-to-face angle** std 90° · 45–135°		°
C	**Face, total coverage** std 4" · 1 1/2"–12"		in
D	**Drip kick** std 35° · 0–60°		°
E	**Drip** std 1/2" · 1/4"–1 1/2"		in
F	**Hem** std Open 1/2" · length 1/4"–1"		in

BUILD

MATERIAL

GAUGE

COLOR

CLAD TYPE

LINEAL FEET

NOTES

Kynar colors: 24 ga unless noted. Clad: 24 ga.

Send it: fill it in, save it, and upload it on the Bend Board at app.ironspiderinc.com — every field is read for you.

Hems and drips are included in the stretchout.

ironspiderfab.com